

**Application**

Upholstery

**Content**

Top - Silicone  
Middle - 100% Polyurethane  
(CPU - Clean Performance Urethane)

**Backing**

100% Polyester

**Width**

54"

**Repeat**

N/A

**General Characteristics**

Abrasion : 500,000+ double rubs (Wyzenbeek)  
Hydrolysis Resistance : 15+ weeks  
- ISO1419:1995, Method C, Tropical Test  
Silicone does not support microbiological growth  
Meets or Exceeds all ACT Heavy Duty Performance  
Guidelines for Upholstery

**Flammability**

CA Bulletin 117-2013, UFAC/NFPA-260  
IMO A.652 (16) 8.2

**Environmental**


Solvent/DMF-Free, PVC/Phthalates Free,  
PFC/PFAS-Free, FR/Anti-Microbial Additives Free  
\*Complies with REACH, Prop 65 &  
California 01350 VOC Emission Standard

**Maintenance\***

W/S, Bleach (10:1)

**Warranty**

Please refer to our Terms of Sales for warranty information.

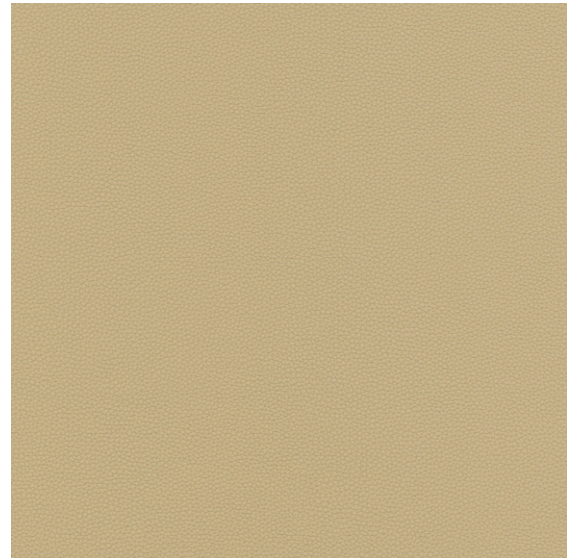

Sand



\* While this product offers excellent protection against ink marks or difficult stains, full removal is not always guaranteed, if stains not addressed promptly.

† Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.