

**Application**

Upholstery

**Contents**

60% Rayon, 40% Polyester, Viscose Rayan Pile Velvet

**Width**

54"

**Repeat**

App. 0.75" H

**Roll Length**

App. 40yds

**General Characteristics**

Superior wear resistance : Exceeds 100,000 rubs (ASTM D4157 Wyzenbeek)†

Meet or Exceeds All ACT Heavy Duty Performance Guideline for Upholstery

Colorfastness to light (AATCC-16/passes)

Colorfastness to crocking (AATCC-8/passes)

**Flammability**

CA Bulletin 117 - 2013

UFAC / NFPA - 260

Motor Vehicle Safety Standard - 302

IMO A652 (16) 8.2

**Care & Cleaning**

Cleaning Code : S

+ All stains and spills should be addressed Immediately. The longer it remains, The more difficult it will be to remove.


+ A professional furniture cleaning service is recommended.

+ Always test on an inconspicuous area first.

**Warranty**

Please refer to our Terms of Sales for warranty information.

† Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

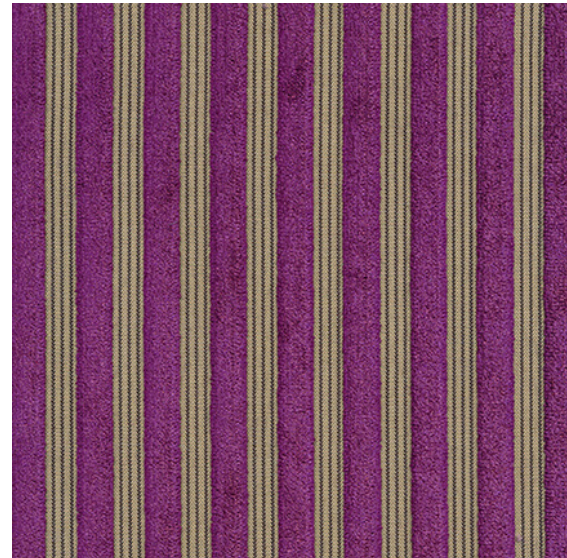

Night shade

